

DIMENSIONS AND WEIGHTS

| MODEL NO. | FIG. | HP | MOTOR SIZE | DISCH. SIZE | DIMENSIONS IN INCHES | | | | | APPROX. SHIP WT. |
|-----------|------|-------|------------|-------------|----------------------|------|------|-----|-----|------------------|
| | | | | | A | B | C | D | E | |
| QF25-3 | A | 2 | 4" | 2" NPT | 30.0 | 15.1 | 14.9 | 3.8 | 3.9 | 38 |
| QF25-5 | A | 3 | 4" | 2" NPT | 40.7 | 20.6 | 20.1 | 3.8 | 3.9 | 64 |
| QF25-8 | A | 5 | 4" | 2" NPT | 51.4 | 23.6 | 27.8 | 3.8 | 3.9 | 78 |
| QF25-12* | A | 7 1/2 | 4" | 2" NPT | 67.5 | 29.6 | 37.9 | 3.8 | 3.9 | 100 |
| QF25-16* | A | 10 | 4" | 2" NPT | 92.1 | 43.9 | 48.2 | 3.8 | 3.9 | 155 |

NOTES: All models suitable for use in 4" wells, unless otherwise noted.
Weights include pump end with motor in lbs.
* Also available with 6" motor. Performance is the same only at Best Efficiency Point.
Consult factory for actual performance.

MATERIALS OF CONSTRUCTION

| COMPONENT | CYLINDRICAL SHAFT (3-16 Stgs.) |
|------------------------|--------------------------------|
| Check Valve Housing | 304 Stainless Steel |
| Check Valve | 304 Stainless Steel |
| Diffuser Chamber | 304 Stainless Steel |
| Impeller | 304 Stainless Steel |
| Suction Interconnector | 304 Stainless Steel |
| Inlet Screen | 304 Stainless Steel |
| Pump Shaft | Duplex Stainless Steel |
| Straps | 304 Stainless Steel |
| Cable Guard | 304 Stainless Steel |
| Priming Inducer | 304 Stainless Steel |
| Coupling | 304 Stainless Steel |
| Check Valve Seat | NBR |
| Top Bearing | NBR |
| Impeller Seal Ring | NBR |
| Intermediate Bearings | NBR |
| Shaft Washer | LCP |
| Split Cone | 304 Stainless Steel |
| Split Cone Nut | 304 Stainless Steel |

NOTES: Specifications are subject to change without notice.

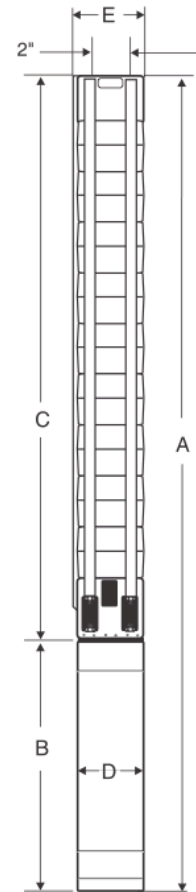


Fig. A

RANGO DE FLUJO: 45-95GPM

DESCARGA: 2"

DIÁMETRO NOMINAL: 4"

